




## ACC/29 - Mountable Light Sensor Adaptor

## ACC/36 - HOPL & UV Spacer for Gland

The ACC/29 light sensor adaptor is intended for use with our Single Channel and Red/ Far Red light sensors. The mount incorporates both a 1/4" UNC and a 10mm long M6 tapped hole in its base. The 1/4" UNC is compatible with some Camera Tripods & Monopods. The M6 countersunk hole is useable with 4.0 to 4.5 wood screws

### ACC/29

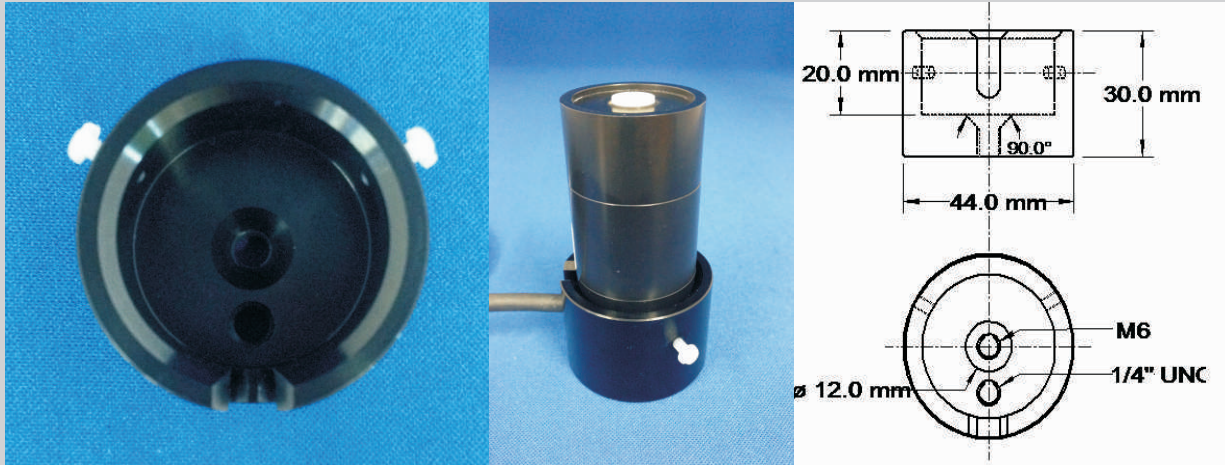

Mount diameter (excluding M3 nylon screws) - 44mm  
The adaptor adds 10mm to the height of the sensor  
ACC/29 is supplied with M3 x 10mm Nylon Screws x2 only

### ADDITIONAL ACCESSORIES:

Since November 2013, all waterproof HOPL and UV sensors are now built with a gland for cable entry into the sensor. Because of this addition, the sensor will not fit correctly into the ACC/29 light sensor adaptor above or SKM 221 leveling units.

For these to be compatible, an additional spacer is required to fit to the bottom of your light sensor. This is screwed into place as each of these light sensors has an M6 tapped hole in the base (screw supplied). The sensor is now able to be securely fixed into the ACC/29 adaptor or SKM 221 leveling unit without any obstruction from the cable gland.

### ORDERING INFORMATION:

ACC/29 - Mountable Light Sensor Adaptor

ACC/36 - HOPL & UV Sensor spacer for use with ACC/29 & SKM 221 leveling units

### ACC/36

